

# URC MAC Filter


Log into your CIS Network Switch with the following credentials

User: urc


Password: urc

You will have a simplified menu.


Select the bridge

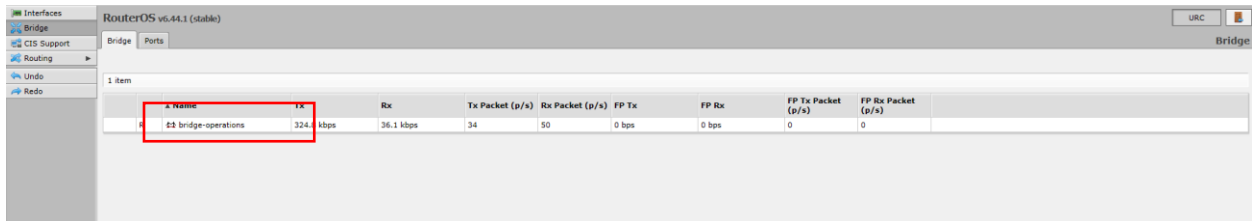

## Enable IGMP Snooping

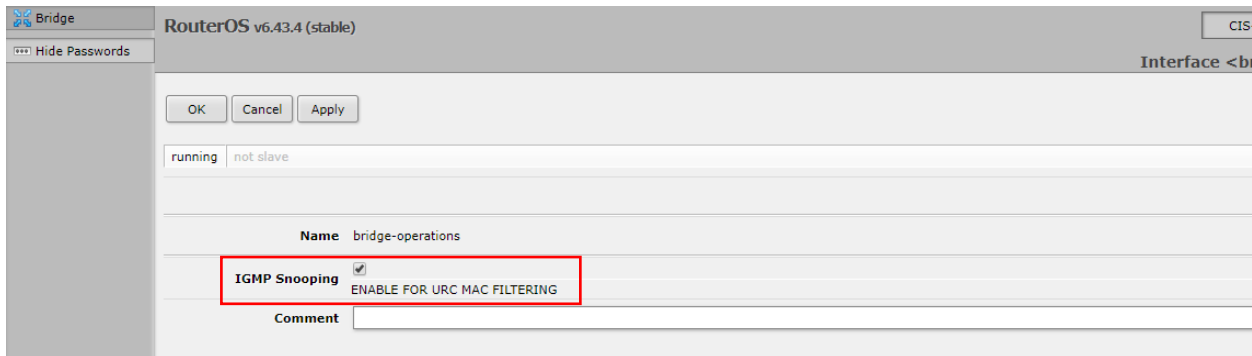


Select the bridge port where the URC DMS unit is connected.

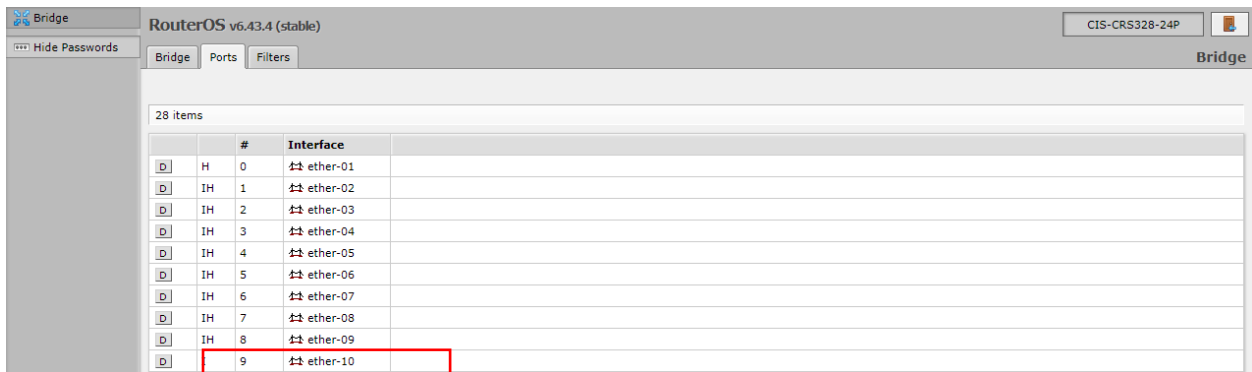


# URC MAC Filter

## Disable Hardware Offload

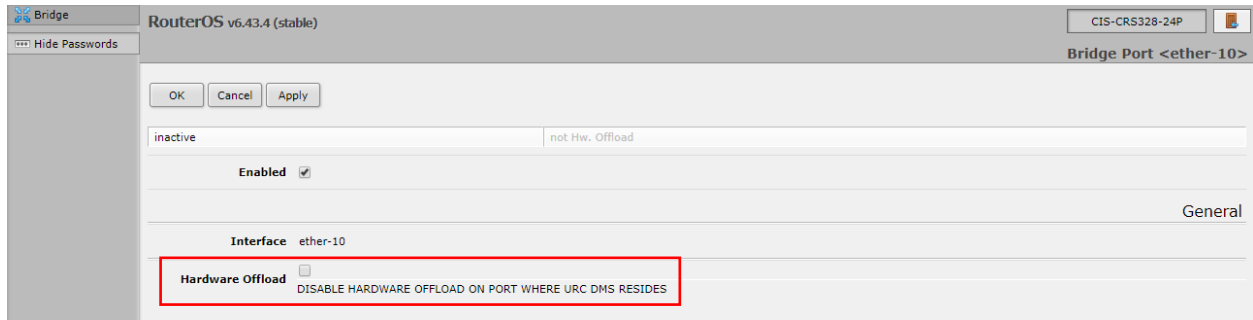

Select Interfaces and enable the port or ports the DMS unit resides.

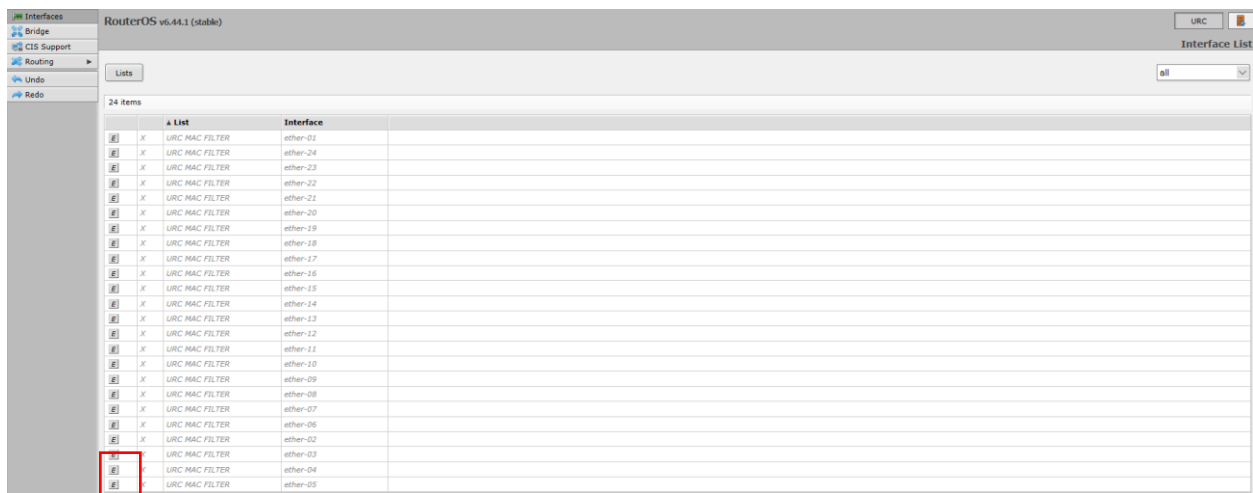

Click on the "E" to enable filtering.

Attach your DMS unit and test.