

Welcome

Thank you for choosing CIS! This quick setup guide will assist you with getting your CIS switch up and running. For more detailed configuration, please check the user manuals located on our website. If you have any questions, please do not hesitate to contact our support team.


The CIS-CRS326-24G switch is equipped with 24 Gigabit Ethernet ports (with Auto MDI/X), 2 SFP+ ports, and an RJ45 serial port that is disabled by default.

Powering the Switch

The switch can be powered via the included 24V DC adapter, or through PoE on port 1.



Connecting Devices

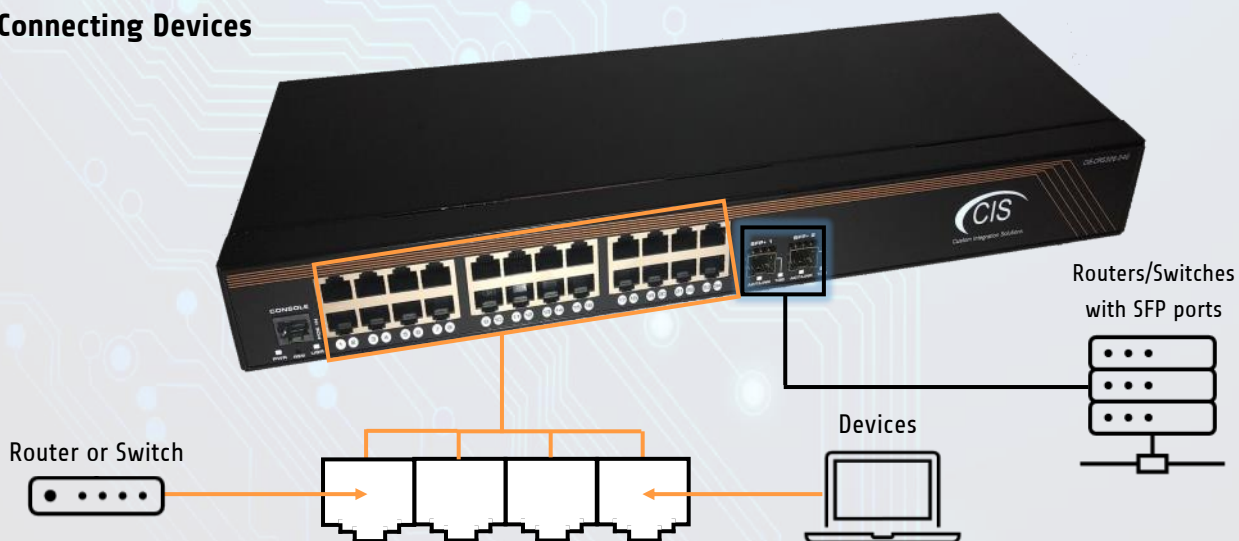


Connect your router or upstream switch to any of the Ethernet ports, or use an SFP or SFP+ connection if your device supports it. Connect your devices to the remaining ports.

Configuring the Switch

The CIS-CRS326-24G is preconfigured to work without any initial configuration. You can configure the VLANs, static IP, and other options by accessing the web interface.


1. Log into your router. Access the DHCP leases. If you're using a CIS router, select **IP** from the left toolbar, **DHCP Server**, then click the **Leases** tab. Locate the switch in the leases, then make note of its current IP address.

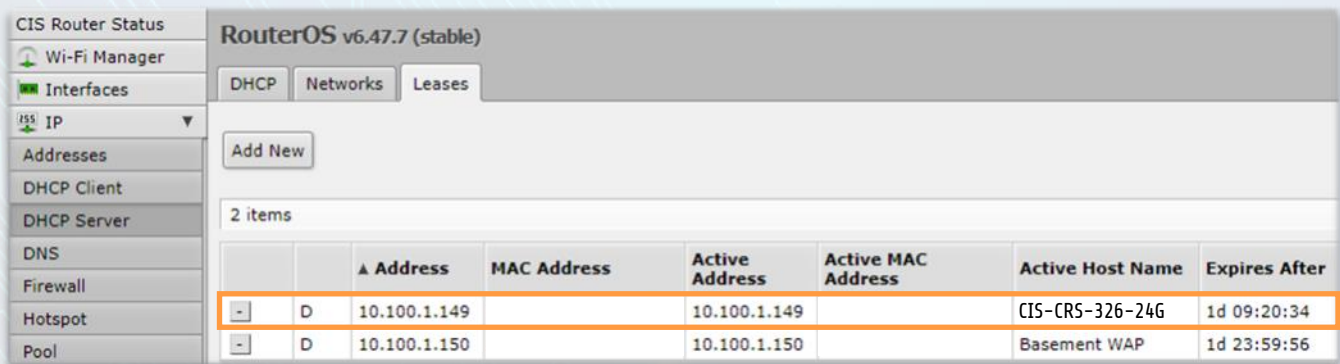

The screenshot shows the RouterOS v6.47.7 (stable) web interface. The left sidebar has a menu with 'IP' selected, and 'DHCP Server' is highlighted. The main area shows the 'Leases' tab with a table of 2 items. The first item is highlighted in orange.

		Address	MAC Address	Active Address	Active MAC Address	Active Host Name	Expires After
-	D	10.100.1.149		10.100.1.149		CIS-CRS-326-24G	1d 09:20:34
-	D	10.100.1.150		10.100.1.150		Basement WAP	1d 23:59:56

2. Open a web browser and navigate to the IP address of your switch. The default username is **cis** and the default password is **integration**.

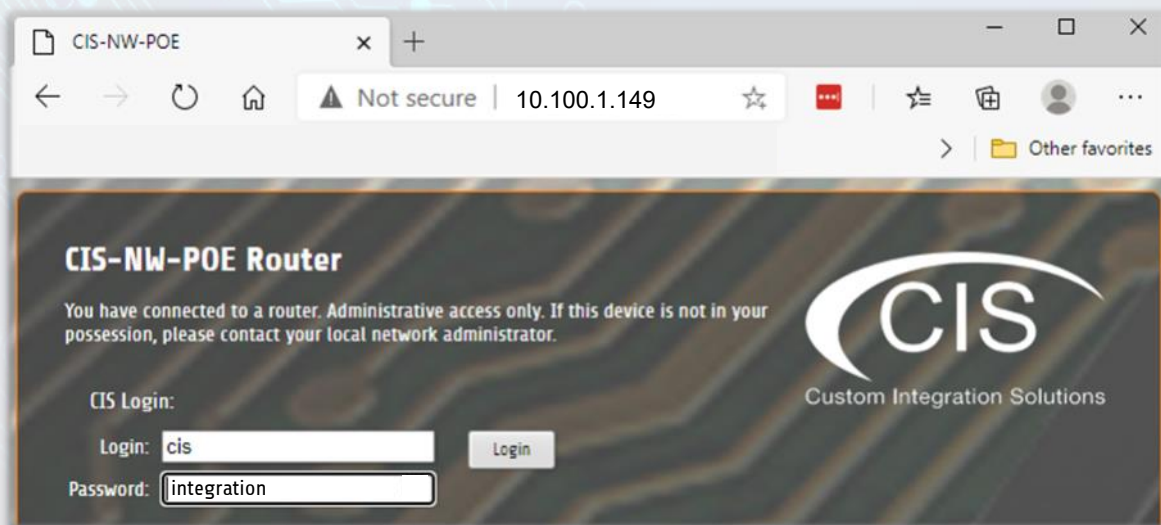

Reset Button

Hold this button during while the device is powered off, then apply power. Keep holding until the USB LED light starts flashing, (5 seconds) then release the button to reset to the default CIS configuration. You can use this procedure if you have forgotten the password to access the device, or simply wish to return the unit to its default configuration state.

Warranty Information

Custom Integration Solutions™ products have a 2-Year Limited Warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products that have been abused, modified, or disassembled. Products to be repaired under this warranty must be returned to Custom Integration Solutions™ or a designated service center with prior notification and an assigned return authorization (RA) number.

Contact Information Web: www.custom-integration-solutions.com

Phone: Technical Support - (888) 976-3651



The CIS-CRS326-24G is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EC.